

# DSL Information Sheet



## Components



Front of Router\*  
(model may vary)



Rear of Router\*



Network Cable  
(RJ45)




DSL Cable  
(RJ11)



Micro Filter

\*a ZyXEL router is shown: for ZyXEL or Technicolor routers use the Grey port with the DSL cable. For other routers, contact Spitfire Support for guidance.

### Standard Socket

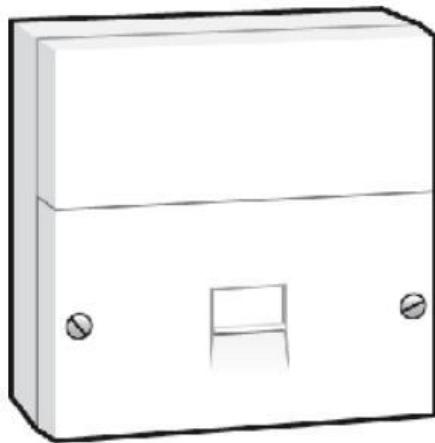


**Filter Required**



Plug the **DSL Cable** into the **Filter** and plug it directly in to the socket.

### Pre-filtered Socket

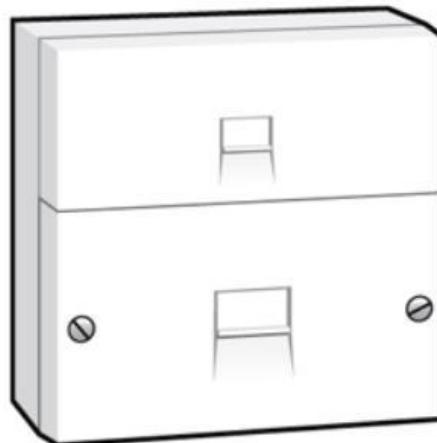

**No Filter Required**



Plug the **DSL Cable** directly in to the socket.

## Wi-Fi



Spitfire Default Wi-Fi Configuration: the SSID and security key are detailed on the label on the reverse of the router. However, for routers configured no-NAT, in Bridge Mode or for circuits in Spitfire's SIP VRF, Wi-Fi is deactivated by default. If a customer has requested a custom Wi-Fi SSID and security key then please note that this will differ from those details on the reverse of the router.

## Spitfire Support

Tel: 020 7501 3030

Email: [support@spitfire.co.uk](mailto:support@spitfire.co.uk)