

# DSL Information Sheet



Filter




DSL Cable



TG588 Router  
(model may vary)


Standard Socket

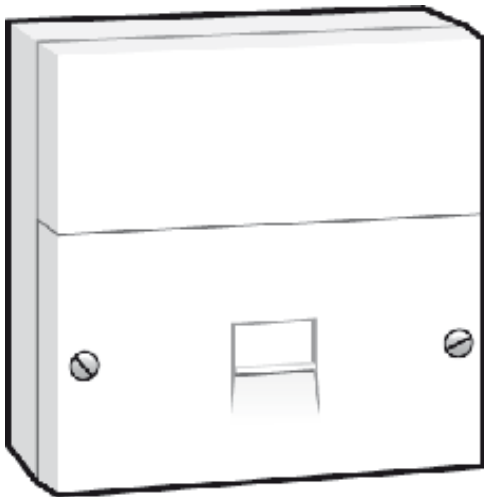

Filter Required ✓

Plug the DSL Cable into the Filter and plug it directly in to the socket.

Pre-filtered Socket

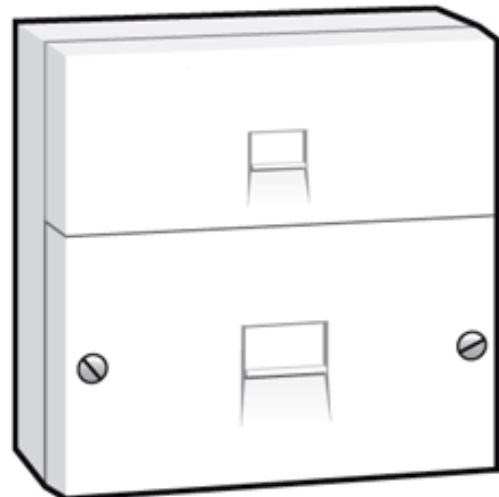

No Filter Required ✗

Plug the DSL Cable directly in to the socket.



Spitfire Default Wi-Fi Configuration: the SSID and security key are detailed on the label on the reverse of the router. However, for routers configured no-NAT, in Bridge Mode, or for circuits in Spitfire's SIP VRF, Wi-Fi is deactivated by default. If a customer has requested a custom Wi-Fi SSID and security key then please note that this will differ from those detailed on the reverse of the router.

Spitfire Support  
Tel: 020 7501 3030  
Email: support@spitfire.co.uk